

## PVI-DESKTOP


### GENERAL SPECIFICATIONS DESKTOP MODELS

- Power-One's PVI-Desktop provides the ability to monitor performance of connected inverters and is ideal for residential and small commercial PV and wind applications.
- In addition to wired connectivity (via RS-485), the PVI-Desktop system can also be connected to six targets inverters via a wireless RF tranceiver link capable of connectivity anywhere within 960 feet (free field). The wireless communication requires an optional radio tranceiver module to be installed in each inverter.



## Features

- The system can be linked to a personal computer via Bluetooth (-BT version) or USB connectivity, and will therefore allow performance monitoring at any location with online access using Aurora Communicator. Energy harvesting data for up to six Aurora inverters can be monitored simultaneously using the PVI-Desktop.

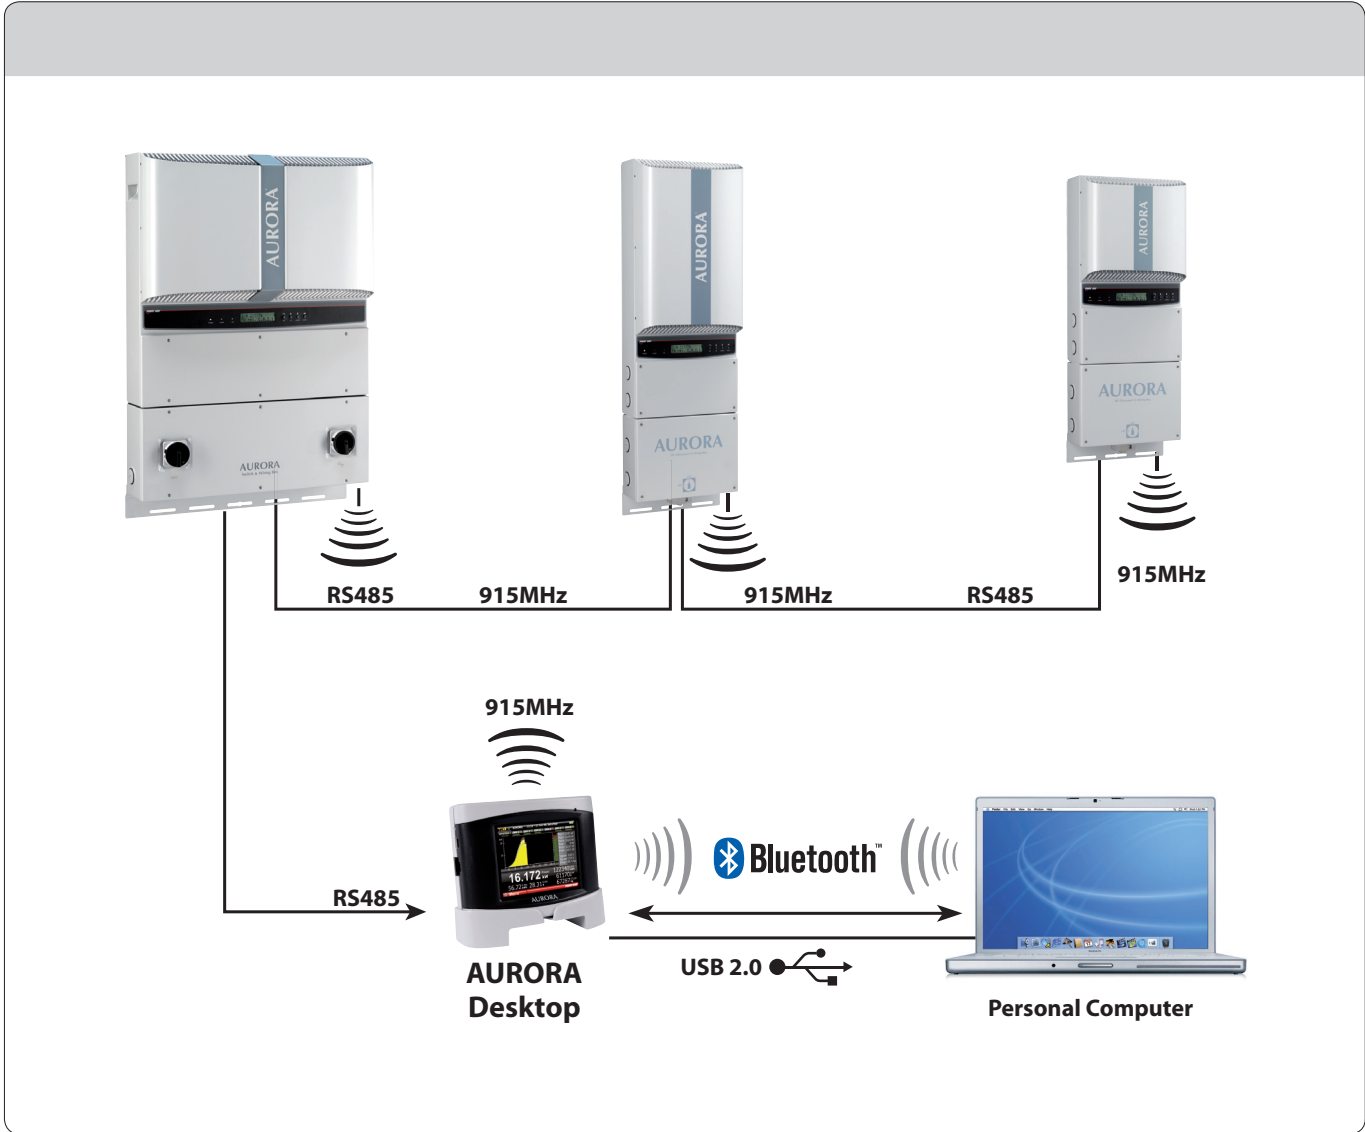

# Desktop Highlights

PARAMETER	PVI-DESKTOP	PVI-DESKTOP-AU	PVI-DESKTOP-US
<b>Inverter Communication - Radio</b>			
Radio Communication	864 MHz	915...927 MHz	915 MHz
Maximum Radio Coverage	300 m / 960 ft Free Space		
Wired Communication	RS485 (Half Duplex 19200 bps)		
Maximum Wired Conenction	2000 m / 3280 ft		
<b>PC Communication</b>			
Wireless	Bluetooth (Optional)		
Wired Communication	USB 2.0		
<b>Connectivity</b>			
Compatibility with Inverters	AURORA® PVI String Series <sup>(1)</sup>		
Maximum Number of AURORA® Inverters	6		
<b>Features</b>			
Data Displaying Parameters	All Parameters of AURORA® Inverters <sup>(1)</sup>		
Data Storage Parameters	Power and Energy (by SD Card)		
Software Upgrade	USB (AURORA® COMMUNICATOR) or SD Card		
Language	IT / EN / ES / DE / FR		
<b>Power Supply</b>			
AC/DC Adapter	5 V, 1 A, 50/60 Hz		
USB	Yes		
Stand Alone	Rechargeble Li-Ion Battery		
<b>Display</b>			
Dimensions	3.5"		
Color	Yes		
Resolution	QVGA 320X240 px		
Type	Integrated Touch Screen Resistive		
<b>Equipment</b>			
Stylus Pen	Yes		
AC Adapter	Yes		
USB Cable	Yes		
SD Card (1GB)	Yes		
<b>Environmental Parameters</b>			
Ambient Temperature Range in °C (°F)	0/+ 40°C (32/104°F)		
Environmental Protection Rating	IP20	IP20	NEMA 1
Relative Humidity	< 90% Non Condensing		
<b>Mechanical</b>			
Dimensions H x W x D	102mm x 125mm x 35mm / 4" x 5" x 2.1"		
Weight	< 0.4 kg / 0.88 lb		
Mounting Kit (Desk and Wall)	Yes		
<b>Available Product Variants</b>			
Standard	PVI-DESKTOP	PVI-DESKTOP-AU	PVI-DESKTOP-US
Bluetooth	PVI-DESKTOP-BT	PVI-DESKTOP-BT-AU	PVI-DESKTOP-BT-US
<b>Safety</b>			
Marking	CE	C-Tick	FCC
Safety and EMC Standards	EN 60950, EN 62311, EN 301 489, EN 50371, EN 300 220, EN 300 328	AS/NZS 4268	FCC Cfr 47 part 15

(1) All AURORA® String Series equipped with Radio Transmitter (Optional Feature). Further information about compatibility on the AURORA® PVI-DESKTOP FAQ – Frequently Asked Question



[www.power-one.com](http://www.power-one.com)

**Power-One Renewable Energy Worldwide Sales Offices**

<u>Country</u>	<u>Name/Region</u>	<u>Telephone</u>	<u>Email</u>
<b>Australia</b>	Asia Pacific	+61 2 9735 3111	sales.australia@power-one.com
<b>China</b>	Asia Pacific	+86 755 2988 5888 ext.5588	sales.china@power-one.com
<b>Singapore</b>	Asia Pacific	+65 6896 3363	sales.singapore@power-one.com
<b>France</b>	Europe	00 800 00287672 Choix n°4	sales.france@power-one.com
<b>Germany</b>	Europe	+49 7641 955 2020	sales.germany@power-one.com
<b>Italy</b>	Europe	+39 055 9195 396	sales.italy@power-one.com
<b>Spain</b>	Europe	+34 629253564	sales.spain@power-one.com
<b>United Kingdom</b>	Europe	+44 1903 823 323	sales.UK@power-one.com
<b>Dubai</b>	Middle East	+971 50 100 4142	sales.dubai@power-one.com
<b>Canada</b>	North America	+1 877 261-1374	sales.canada@power-one.com
<b>USA East</b>	North America	+1 877 261-1374	sales.usaeast@power-one.com
<b>USA Central</b>	North America	+1 877 261-1374	sales.usacentral@power-one.com
<b>USA West</b>	North America	+1 877 261-1374	sales.usawest@power-one.com