




Quality. Performance. Value.

PERC MONO CRYSTALLINE MODULE -----HALF CELLS

DM460M6-72HSW

445 / 450 / 455 / 460

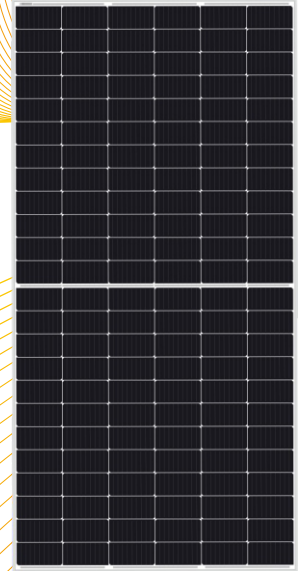

Technology

High module conversion efficiency through superior manufacturing technology



Half-Cut Design

Avoid the hot spot effect
Reduce power degradation



PID Free

Excellent PID resistance according to IEC TS 62804-1



Performance

High performance under low light conditions (Cloudy days, mornings and evenings)



Quality

Manufactured according to International Quality and Environmental Management Systems (ISO9001, ISO14001)



Value

Our vertically integrated business model allows for competitive pricing and great value

www.dmegc.solar

Superior Manufacturing-Quality Assurance




- All modules are manufactured using TQC & SPC quality control systems
- Advanced cell sorting to avoid electric mismatch
- 100% EL Test-before lamination & prior to shipment
- Comprehensive Safety and Reliability tests are performed

Power Output



- Our IP68 rated junction box improves module performance and stability
- High-performance connectors provide low resistance interconnection to ensure the full utilization of module output power

Warranty



- 12 Years Manufacturers Warranty
- Linear Power Output Warranty, no less than 84.8% at year 25th

Visible Quality



- Durable, high-quality
- Rigid construction: 5400Pa & 2400Pa rated assembly



Electrical Specifications

*STC irradiance of 1000W/m² spectrum AM 1.5 and cell temperature of 25°C

Module Type	DM445M6-72HSW DM445M6-72HSW-V		DM450M6-72HSW DM450M6-72HSW-V		DM455M6-72HSW DM455M6-72HSW-V		DM460M6-72HSW DM460M6-72HSW-V	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Pm(W)	445	330.3	450	334.2	455	338.0	460	341.5
Imp(A)	10.92	8.89	11.01	8.96	11.10	9.03	11.18	9.10
Vmp(V)	40.77	37.17	40.91	37.30	41.04	37.42	41.17	37.53
Isc(A)	11.35	9.15	11.43	9.21	11.51	9.28	11.59	9.34
Voc(V)	50.12	46.92	50.27	47.06	50.42	47.20	50.57	47.34
Module Efficiency(STC)	20.47%		20.70%		20.93%		21.16%	
Power tolerance:0~+3%	*NMOT irradiance of 800W/m ² , spectrum AM 1.5, ambient temperature 20°C, wind speed 1m/s							

Mechanical Data

Cell Type	DMPD9B166-223(1/2)
Cell Arrangement	144(6x24)
Module Structure	Glass/EVA/Backsheet(white)
Glass Thickness	3.2mm
PV module classification	Class II
Junction Box Rating	IP67/IP68
Cables	4mm ² /1300mm or Customized Length
Connector Type	MC4/MC4 Compatible
Fire Rating Class	C

Maximum Ratings

Operating Temperature	-40°C to +85°C
Maximum Load Capacity	Snow 5400Pa/Wind 2400Pa
Maximum System Voltage	1000V/1500V DC(IEC)
Maximum Series Fuse Rating	20A
Number of Diodes	3

Packaging

Module Dimensions	2094x1038x40mm
Weight	24.6kg
Pallet Dimensions	2135x1130x1175mm
Container	40' HQ
Pieces per Pallet	27
Pallets per Container	22
Pieces per Container	594
Gross Weight per Pallet	710kg
Gross Weight per Container	15620kg

Temperature Characteristics

Nominal Module Operating Temperature (NMOT)	42°C±3°C
Temperature Coefficient of Isc	+0.038%/°C
Temperature Coefficient of Voc	-0.270%/°C
Temperature Coefficient of Pmax	-0.365%/°C

